



A GMS COMPANY

Kamco.com

Brooklyn
80 21st Street,
Brooklyn, NY 11232
718-768-1234

Manhattan
506 West 21st Street
New York, NY 10011
212-736-7350


Bronx
2401 Gleason Avenue
Bronx, NY 10462
718-435-1234

Long Island
301 Robbins Lane
Syosset, NY 11791
516-935-8660

New Jersey
845 East 25th Street
Paterson, NJ 07513
973-247-1234

HOLLOW METAL FRAMES

Technical Data Sheet

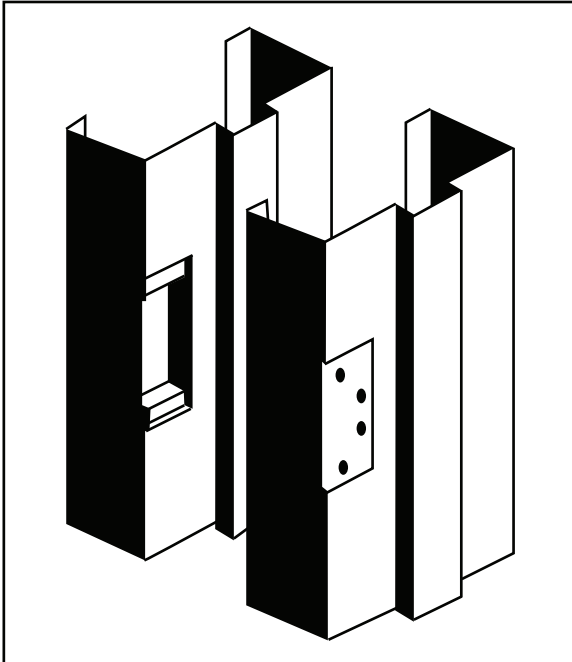


SPECIFICATIONS

- #16 Gauge Galvaneal Steel Frame
- For 1-3/4" Hollow Metal or Wood Doors
- Available Knock-Down or Welded
- Fast and Easy Installation
- Prepped for three 4-1/2" Hinges and one 4-7/8" Strike Plate
- Available for Drywall or Masonry Applications.

STANDARD SIZES

WIDTH		HEIGHT	THROAT SIZES
SINGLE	PAIR		
2'-0"	4'-0"	6'-8"	3-3/4"
2'-4"	4'-8"		
2'-6"	5'-0"		4-5/8"
2'-8"	5'-4"		
2'-10"	5'-8"	7'-0"	4-7/8"
3'-0"	6'-0"		
3'-6"	7'-0"		6-1/8"
3'-8"	7'-4"		
4'-0"	8'-0"		

DIRECTIONAL SWING

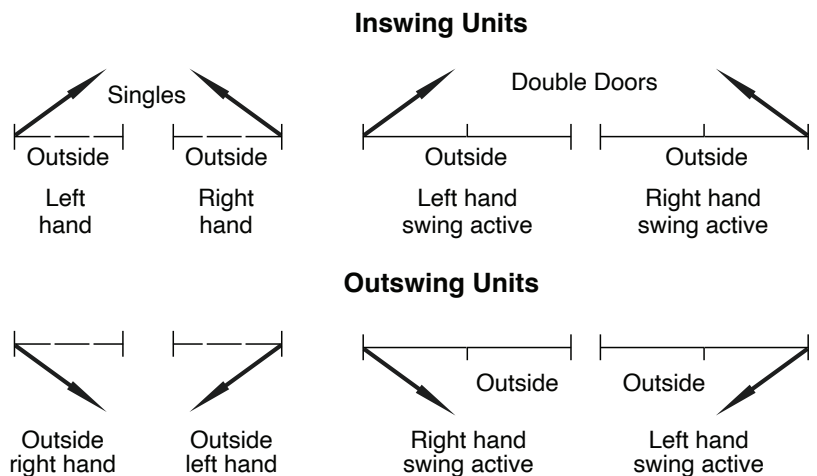

WALL SIZES

3-3/4" WALL = 2"x3" STUD WITH SINGLE LAYER OF 5/8" GYPSUM BOARD EACH SIDE
 4-5/8" WALL = 2"x4" STUD WITH SINGLE LAYER OF 1/2" GYPSUM BOARD EACH SIDE
 4-7/8" WALL = 2"x4" STUD WITH SINGLE LAYER OF 5/8" GYPSUM BOARD EACH SIDE
 6-1/8" WALL = 2"x4" STUD WITH DOUBLE LAYER OF 5/8" GYPSUM BOARD EACH SIDE